


Supplies:


- Approximately 12" by 18" rectangle for the front of the stocking (or piece from scraps as desired)
- Approximately 12" by 18" rectangle of batting
- Approximately 12" by 18" rectangle of lining fabric
- Approximately 12" by 18" rectangle of backing fabric
- 7" by 14 3/4" rectangle of white solid fabric for cuff
- 2" by 6" rectangle of scrap fabric for stocking hangar OR use a 6" length of 1/2" wide ribbon

1) Pin pattern to 12" by 18" stocking front fabric and cut one. Layer lining, batting and stocking front and quilt as desired. Place quilted front on backing rectangle, right sides together (Diagram IV). Stitch around the stocking, 1/4" from trimmed edge, leaving top unstitched. Trim backing fabric even with stocking front. Turn stocking right side out.

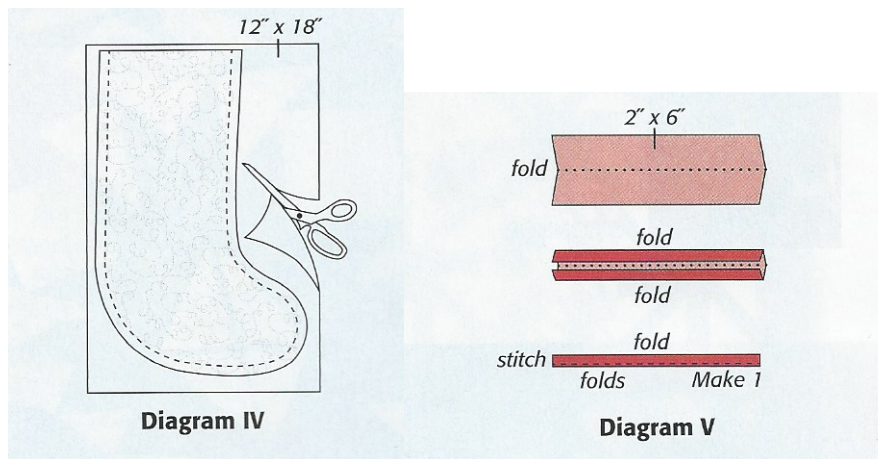

3) Fold 2" by 6" rectangle in half lengthwise, wrong sides together (Diagram V). Fold long raw edges to meet at center fold, and press. Fold once more (strip will be 1/2" wide) and stitch close to folds, sewing through all layers. Fold in half to make hanging loop. NOTE: Skip this step if using ribbon for stocking hangar.

4) Referring to Diagram VI, sew together short sides of white 7" by 14 3/4" rectangle, right sides together. Turn right sides out and fold so that raw edges along the long sides are aligned to make cuff.

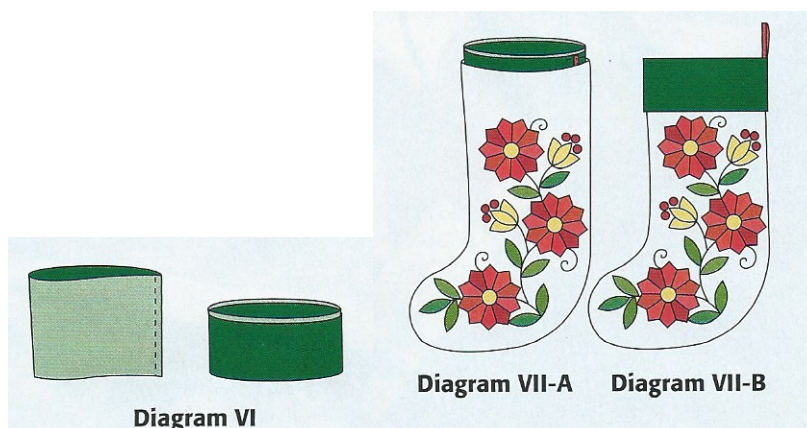

5) Referring to Diagram VII-A, pin hanging loop inside stocking. Place cuff inside stocking, align all raw edges and pin (the hanging loop will be between cuff and stocking). Stitch 1/4" around top. Turn cuff to right side of stocking (Diagram VII-B).